


UPON COMPLETION OF ACCEPTED PLACEMENT AND COMPACTION OF BASE MATERIAL, PLACE 2-1½" LAYERS OF PG 64-10 ASPHALT CONCRETE PAVING MATERIAL, MINIMUM, TO DIMENSIONS SHOWN (SEE NOTE 5).

REMOVE 6 INCHES OF EXISTING PAVEMENT OUTSIDE OF PIPELINE TRENCH PRIOR TO PLACEMENT OF TOP 1½" LAYER OF PG 64-10 ASPHALT CONCRETE PAVING MATERIAL (SEE NOTE 5).

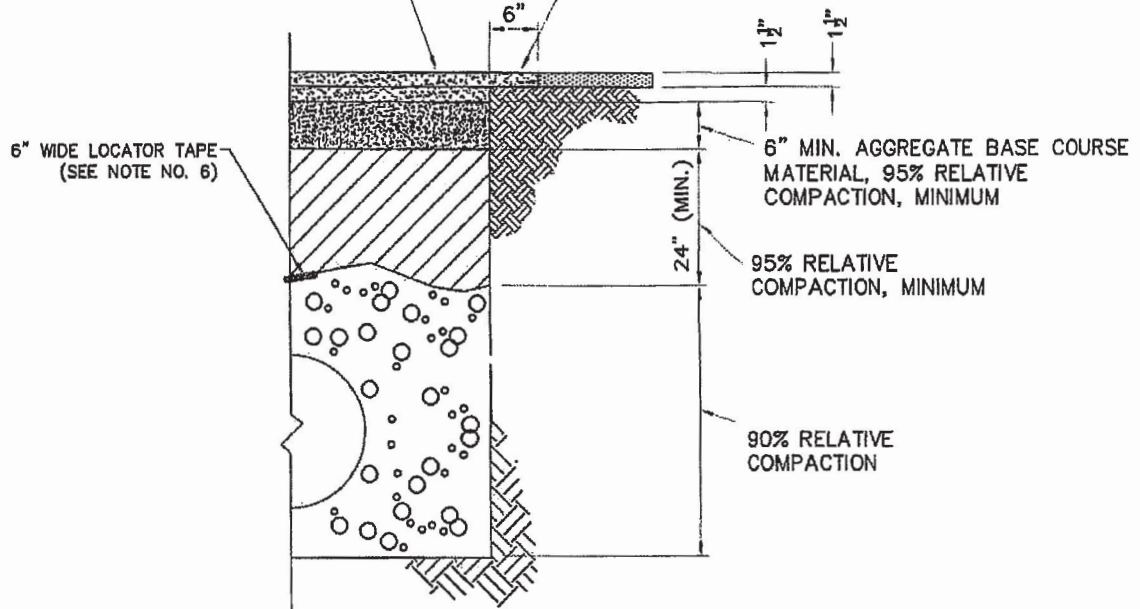

**PAVING DETAIL**

NOT TO SCALE

**GENERAL NOTES:**

1. ALL EXCAVATION AND TRENCHES OF DEPTH IN EXCESS OF 5 FEET SHALL BE PROPERLY SHEETED AND BRACED TO FURNISH SAFE AND ACCEPTABLE WORKING CONDITIONS AS REQUIRED BY Cal/OSHA.
2. PIPELINE SHALL HAVE A MINIMUM COVER OF THREE (3) FEET, UNLESS OTHERWISE NOTED.
3. THE MINIMUM RELATIVE COMPACTION REQUIRED FOR THE FULL BACKFILL WIDTH SHALL BE AS FOLLOWS:  
 BEDDING AND PIPE ZONE MATERIAL.....90%  
 TRENCH BACKFILL (UPPER 24 INCHES)...95%
4. IRRIGATION PIPELINE SHALL BE BEDDED IN SAND, DECOMPOSED GRANITE OR GRAVEL. THE BEDDING MATERIAL SHALL EXTEND 12" OVER THE TOP OF THE PIPE.
5. VERIFY PAVEMENT REPLACEMENT WITH AGENCY OF JURISDICTION. THE SURFACE IN UNPAVED AREAS SHALL BE REPLACED IN-KIND.
6. FOLLOWING BACKFILL AND COMPACTION OF THE PIPE ZONE, CORROSION RESISTANT SOIL LOCATOR TAPE MARKED "CAUTION-IRRIGATION LINE BURIED BELOW" SHALL BE LAID IN THE COMPLETE PIPELINE ALIGNMENT ON TOP OF THE BEDDING MATERIAL AND CENTERED OVER THE PIPELINE. THE TAPE SHALL BE RUN CONTINUOUS AND, AT THE TAPE ENDS OR INTERSECTIONS OF THE PIPELINE ALIGNMENT, THE TAPE SHALL BE COUPLED TOGETHER WITH MANUFACTURER'S APPROVED METAL STAPLES. THE TAPE SHALL BE SIX (6) INCHES WIDE, BLUE IN COLOR WITH BLACK LETTERING AND SHALL BE AS MANUFACTURED BY GRIFFOLYN CO., INC., OF HOUSTON, TEXAS, OR APPROVED EQUAL.